



Nothing else measures up!

Follow us!



Prospect House
George Cayley Drive
Clifton Moor
York
England
YO30 4XE

Tel: +44 (0) 1904 692723
Fax: +44 (0) 1904 690385

E-Mail: sales@yorksurvey.co.uk



Flag-Mark Insertion Tools



Operating Instructions



Insertion Tool




Code: 14190

Directions for Driver use.

1. Lay the flag to be inserted on ground.
2. Place the driver point approx 1" from bottom of the flag wire.
3. Hold the flag driver upright.
4. Slide the driver handle up and down forcefully the flag will rise to a vertical position.
5. Remove the flag driver.
6. The Flag is now upright.

Now Available:

Replacement Points
Codes: 14192 / 14198

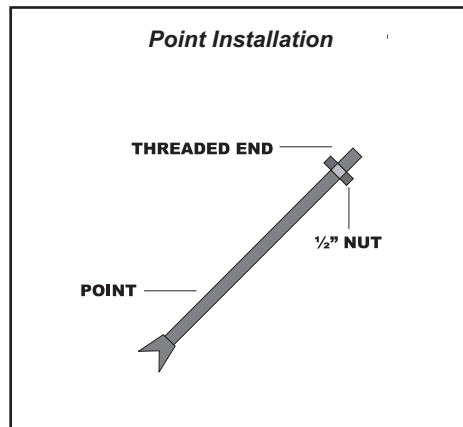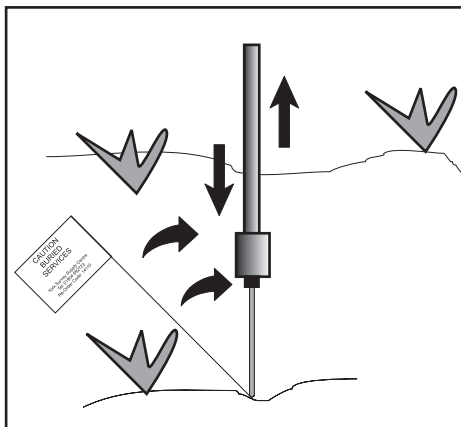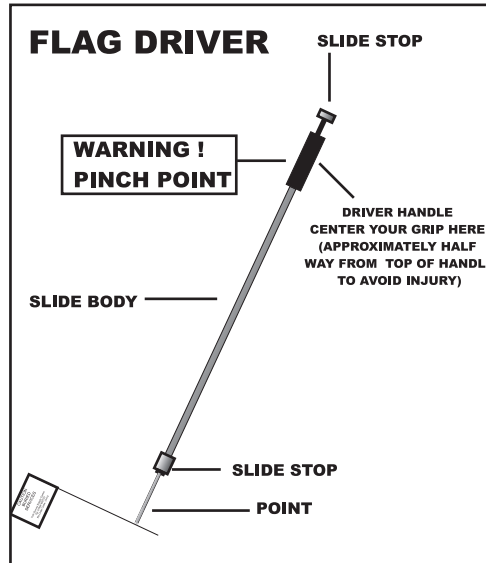


Handy Carrier Probe

Code: 14196

When using the carrier probe to make a hole in the soil, use a turning & twisting motion while pushing downward. A side to side motion will eventually break the point.

21" Stake Bag Now Available Code: 80-8093

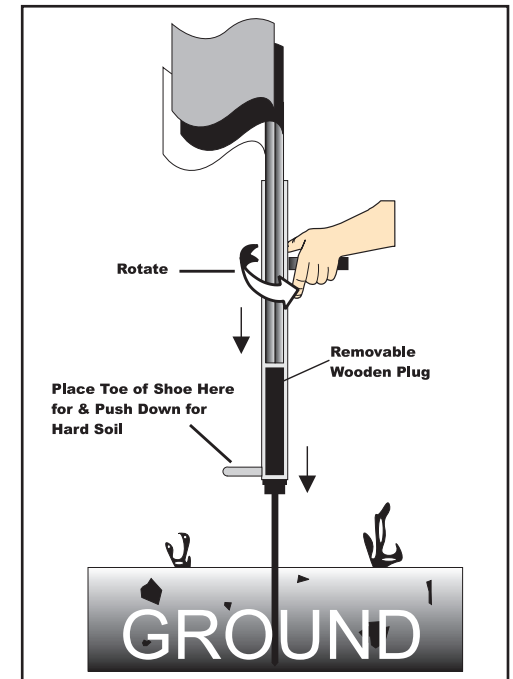

The Probe point is reversible. If you have received your carrier probe with the point *not* showing please do the following:

